

EP 0 951 889 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication: 27.10.1999 Bulletin 1999/43

(51) Int Cl.6: **A61F 13/15**, A61F 13/46, A61F 13/42, A61L 15/56

(11)

(21) Application number: 99303062.6

(22) Date of filing: 20.04.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU

MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 20.04.1998 JP 10968898

(71) Applicant: UNI-CHARM CORPORATION Kawanoe-shi Ehime-ken (JP)

(72) Inventors:

Wada, Mitsuhiro,
 c/o Research & Development Div.
 Mitoyo-gun, Kagawa-ken 769-1602 (JP)

Kido, Tsutomu,
 c/o Research & Development Division
 Mitoyo-gun, Kagawa-ken 769-1602 (JP)


(74) Representative: Parry, Christopher Stephen
 Saunders & Dolleymore,
 9 Rickmansworth Road
 Watford, Herts. WD1 7HE (GB)

(54) Disposable body fluids absorbent article

(57) A disposable body fluids absorbent article includes a topsheet 2 having a plurality of apertures 6 extending therethrough and an absorbent core 4 covered

with the topsheet 2, the topsheet 2 and core 4 are colored so as to ensure a color difference (ΔE) in NBS unit between the topsheet 2 and portions of the core 4 which are seen through the apertures 6.

FIG.2

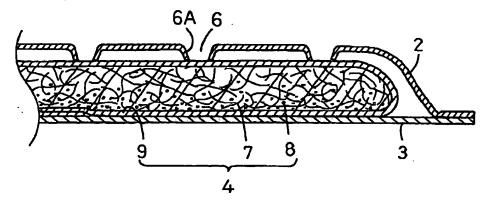

[0001] The present invention relates to disposable body fluids absorbent articles and, more particularly, to such articles such as sanitary napkins, menstruation pads, panty-liners, disposable diapers and the like.

1

[0002] Japanese Patent Publication No: Hei5-24783 discloses a technique to provide outer surfaces of body fluids absorbent articles such as sanitary napkins and panty-liners with aesthetic patterns. According to the technique disclosed therein, a body-facing side of the napkin comprises a relatively bright colored outer cover made of a thermoplastic resin sheet and a relatively dark colored inner layer made of a thermoplastic resin sheet. Embossed pattern of the outer cover is held in contact with the inner layer so that individual emboss parts of the outer cover occupied by the embossed pattern may be seen darker than the remainder from an outside of the outer cover.

[0003] The above-mentioned technique can provide the body-facing side of the body fluids absorbent article with an aesthetic appearance and, at the same time, effectively mark a reference zone of the body-facing side when the latter is placed against a wearer's skin by providing only the reference zone with the pattern. However, according to this known technique, the reference zone provided with said pattern is necessarily densified and rigidified as the outer cover is embossed and held in contact with the inner layer. The resultant high rigidity sometimes uncomfortably irritates the wearer's soft skin.

[0004] In view of the problem as has been described above, it is an object of the invention to provide a bodyfacing side of a disposable body fluids absorbent article with a pattern serving to mark the foregoing reference zone without deterioration of a softness desired for this type article.

[0005] According to the present invention, there is a disposable body fluids absorbent article comprising a liquid-pervious topsheet, a liquid-impervious backsheet and a liquid-absorbent core disposed between the topsheet and the backsheet, wherein: the topsheet is formed with a plurality of liquid-pervious apertures each having a diameter of 0.15.0 mm and a color difference (ΔE) of 1.5 or higher in NBS unit is ensured between a color of the topsheet on upper peripheral zones of the apertures and a color of the core on an upper surface thereof which can be seen through the apertures.

Fig. 1 is a perspective view showing a sanitary napkin according to one embodiment of the present invention as partially broken away;

Fig. 2 is a fragmentary sectional view of the sanitary napkin taken along line II-II in Fig. 1; and

Fig. 3 is a perspective view showing a specific embodiment of the present invention in the form of a blood absorbent pad as partially broken away.

[0006] Details of a disposable body fluids absorbent article according to the present invention will be more fully understood from the description given hereunder with reference to the accompanying drawings.

[0007] Fig. 1 is a fragmentary perspective view showing an article in the form of a sanitary napkin as partially broken away and Fig. 2 is a sectional view of the napkin taken along line II-II.

[0008] Napkin 1 comprises a liquid-pervious topsheet 2, a liquid-impervious backsheet 3 and a liquid-absorbent core 4 disposed between the topsheet 2 and the backsheet 3. The topsheet 2 and the backsheet 3 are placed upon each other and bonded together along their portions extending outwardly beyond a peripheral edge of the core 4. The topsheet 2 is made of a plastic film provided with a plurality of apertures 6 each having a diameter of 0.1 ~ 5 mm and colored in white. Each of these apertures 6 is defined by a tubular wall 6A extending from a peripheral edge of the aperture 6 down towards the core 4. The backsheet 3 is made of a plastic film, more preferably, of a breathable but liquid-impervious plastic film. The core 4 is formed by a mixture of fluff pulp and superabsorptive polymer particles 8 covered with a tissue paper 9. The tissue paper 9 is colored in relatively dark blue.

[0009] With this napkin 1, the tissue paper 9 can be seen through the apertures 6 of the topsheet 2. The topsheet 2 is colored in white and the tissue paper 9 is colored in blue so that these two colors may have a color difference (ΔE) of 1.5 or higher in NBS unit. Such relatively high color difference between the color of the topsheet 2 extending around the apertures 6 and the color of the tissue paper 9 seen through these apertures 6 enables a napkin-wearer to easily detect the presence of the apertures 6. Assumed that the tissue paper 9 presents a natural color of pulp itself without being intentionally colored, the color difference would be at most in the order of 0.2 ~ 1 and insufficient to make the wearer aware of the presence of the apertures 6.

[0010] Colors of the topsheet 2 and the tissue paper 9 are not limited to white and blue. Appropriate combination of various colors of them will improve an aesthetic appearance of the napkin 1, particularly of its body-facing side. It is also possible without departing from the spirit and the scope of the present invention to partially color the topsheet 2 as well as the tissue paper 9, instead of entirely coloring them. For example, coloring of the topsheet 2 may be limited to an upper peripheral zone of every aperture 6 and coloring of the tissue paper 9 may be limited to its portions which can be seen through the respective apertures 6.

[0011] Fig. 3 is a fragmentary sectional view showing a body fluids absorbent article in the form a blood absorbent pad 11 as partially broken away. The pad 11 comprises a liquid-pervious topsheet 2 destined to be placed against an affected part or the like and made of a thermoplastic synthetic fiber nonwoven fabric, a liquidimpervious backsheet 3 made of a plastic film and a liq-

50

4

uid-absorbent core 4.

[0012] The topsheet 2 comprises component fibers colored so as to present a relatively deep white tone and provided in its central zone with a plurality of apertures 6 each having a diameter of $1 \sim 5$ mm.

[0013] The core 4 comprises a package 12 including a mixture of fluff pulp and superabsorptive polymer particles 8 wrapped with a tissue paper 9, and a cushion sheet 13 made of a spun bond nonwoven fabric disposed between the topsheet 2 and the package 12. The spun bond nonwoven fabric is colored in relatively deep pink so that a color difference of 1.5 or higher may be ensured between the topsheet 2 and the cushion sheet 13. In addition, the spun bond nonwoven fabric is treated to become hydrophilic so that an amount of blood discharged on the topsheet 2 can rapidly transfer to the package 12.

[0014] With the pad 11 arranged as has been described above, the pink-colored cushion sheet 13 can be seen through the apertures 6 provided in a central zone of the pad 11 and the color facilitates a user of the pad 11 to recognize the central zone of the pad 11. Accordingly, the user can accurately and rapidly place the central zone against an affected part or the like. If the topsheet 2 is adapted to be pervious for body fluids only through its apertures 6, handling of the pad 11 will be further facilitated by the fact that visual detection of the apertures 6 can be easy for the user.

[0015] The body fluids absorbent article according to the present invention facilitate the user thereof to visually detect the apertures of the topsheet because of a color difference (ΔE) of 1.5 or higher in NBS unit can be ensured between the topsheet and the portions of the liquid-absorbent core which can be seen through the apertures. Such measure used to facilitate the visual detection of the apertures never rigidifies the topsheet as well as the liquid-absorbent core and therefore never deteriorates a soft touch of this article.

Claims

 A disposable body fluids absorbent article comprising a liquid-pervious topsheet, a liquid-impervious backsheet and a liquid-absorbent core disposed between said topsheet and said backsheet, wherein:

said topsheet is formed with a plurality of liquid-pervious apertures each having a diameter of $0.1 \sim 5.0$ mm and a color difference (ΔE) of 1.5 or higher in NBS unit is ensured between a color of said topsheet on upper peripheral zones of said apertures and a color of said core on an upper surface thereof which can be seen 55 through said apertures.

2. A disposable body fluids absorbent article accord-

ing to Claim 1, wherein each of said apertures is defined by a tubular wall extending from a peripheral edge thereof down towards the said core.

 A disposable body fluids absorbent article acceding to Claim 1, wherein said topsheet is made of either of a plastic film and a nonwoven fabric.

3

40

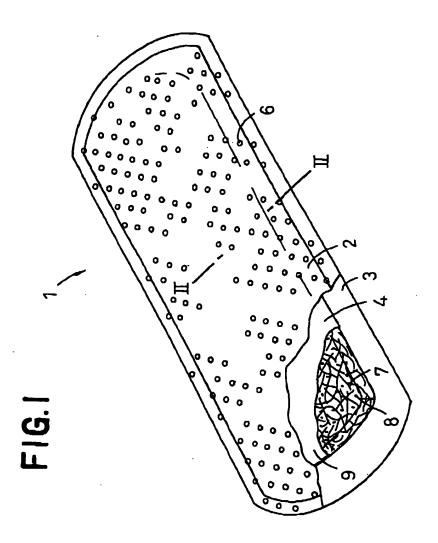


FIG.2


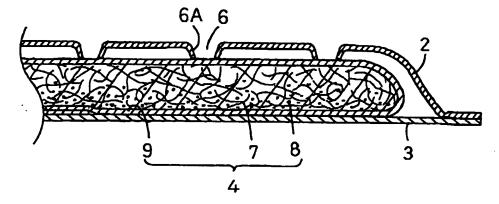


FIG.3



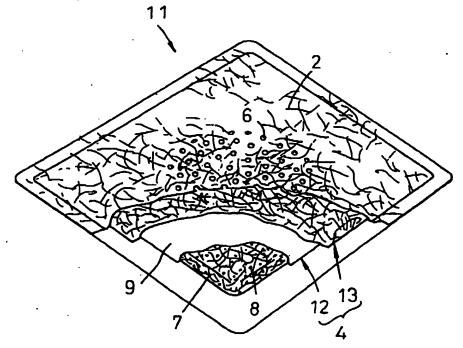

EUROPEAN SEARCH REPORT

Application Number

Category	Citation of document with indication, where appropriate, R of relevant passages to			CLASSIFICATION OF TH APPLICATION (Int. Cl. 6)
A,D	08 May 1985,	DDUCTS COMPANY) fig., page 7, li	nes 1,3	A 61 F 13/7 A 61 F 13/4 A 61 F 13/4 A 61 L 15/5
A	1997,	1.) 25 November column 2, lines	48,	
A	US 5454800 A (HIRT et al.) 1995, claims 1 10-26, c 29-34.			
A		al.) 10 May 1977, column 2, lines		TECHNICAL FIELDS SEARCHED (Int. CL.6)
A	US 3918454 A (KORODI et al 1975, claims,	fig	1	A 61 F A 61 L
	he present search report has l acral which VIENNA	been drawn up for all claims Disc of completion of the se 26-07-1999	urth	Examiner SCHÅFER
X : particul: Y : particul: docume:	ECORY OF CITED DOCUME arty relevant if taken alone arty relevant if combined with an or of the same category opical background	E : earlier p: after the other D : documen	r principle underlying th atent document, but put filing date at cited in the application at cited for other reason	blished on, ar oa

6

EP 0 951 889 A1

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 97303062.6

This armsx lists the patent family members relating to the patent documents cited in the above-mentioned search report. The members are as contained in the EPIDUS INFADUC file on 30. 7,1999.

The European Patent Office is in no may liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report		Publication date	Pater eed	t family ber(s)	Publication date	
EP A1	140560	08-05-1985	EABAABUYYAABABAAAAAAAAAABCEEEEEEHIJJMNFFSUXX	38770 38770 33059882 9596821 12292566 29925369 299253788 29554889 29554889 29554889 29554889 29554889 29554889 29554889 46022475255 1692475255 1692288 4623788 46237884	15-12-1988 21-03-1985 07-01-1988 06-08-1985 17-11-1985 17-11-1988 01-01-1987 16-08-1987 17-01-1987 17-01-1985 14-04-1985 19-12-1990 03-04-1985 19-03-1990 21-12-1990 21-12-1990 21-12-1990 21-12-1990 21-12-1990 21-12-1990 21-12-1990 21-12-1990 21-12-1990 21-12-1990 21-12-1990 01-10-1984 28-10-1989 18-11-1986 16-04-1986	
US A	5454800	03-10-1995	484444111 4844441111 48644461111 486444611111111111111111111111111111111	68264/94 680910 9406288 21042453 1124448 2705028 2705028 8510150 9426221	12-12-1974 14-08-1995 26-12-1995 13-11-1994 12-06-1996 28-05-1997 18-11-1994 27-10-1995 29-10-1996 24-11-1994	
US A	4022211	10-05-1977	none		يور بين چې دغه فده لغاه سدا خک لچي ووړ وود خپې شند کنا مغه غده لبط کاده د	
US A	3918454	11-11-1975	none			
US A	5690624	25-11-1997	AU A1 ACCANA BCANA	71945/96 703558 9604628 2191421 1158244 776645 9140742	05-06-1997 25-03-1999 23-06-1998 30-05-1997 03-09-1997 04-06-1997 03-06-1997	

For more details about this annex see Official Journal of the European Patent Office, No. 12/82.